

**HYDROMECHANICS** 

0

**AERODYNAMICS** 

STRUCTURAL **MECHANICS** 

0

APPLIED **MATHEMATICS**  ANALYSIS FOR DETERMINING STRESSES IN STIFFENED CYLINDRICAL SHELLS NEAR STRUCTURAL DISCONTINUITIES

by


Robert D. Short and Robert Bart



STRUCTURAL MECHANICS LABORATORY RESEARCH AND DEVELOPMENT REPORT

June 1959

Report 1065

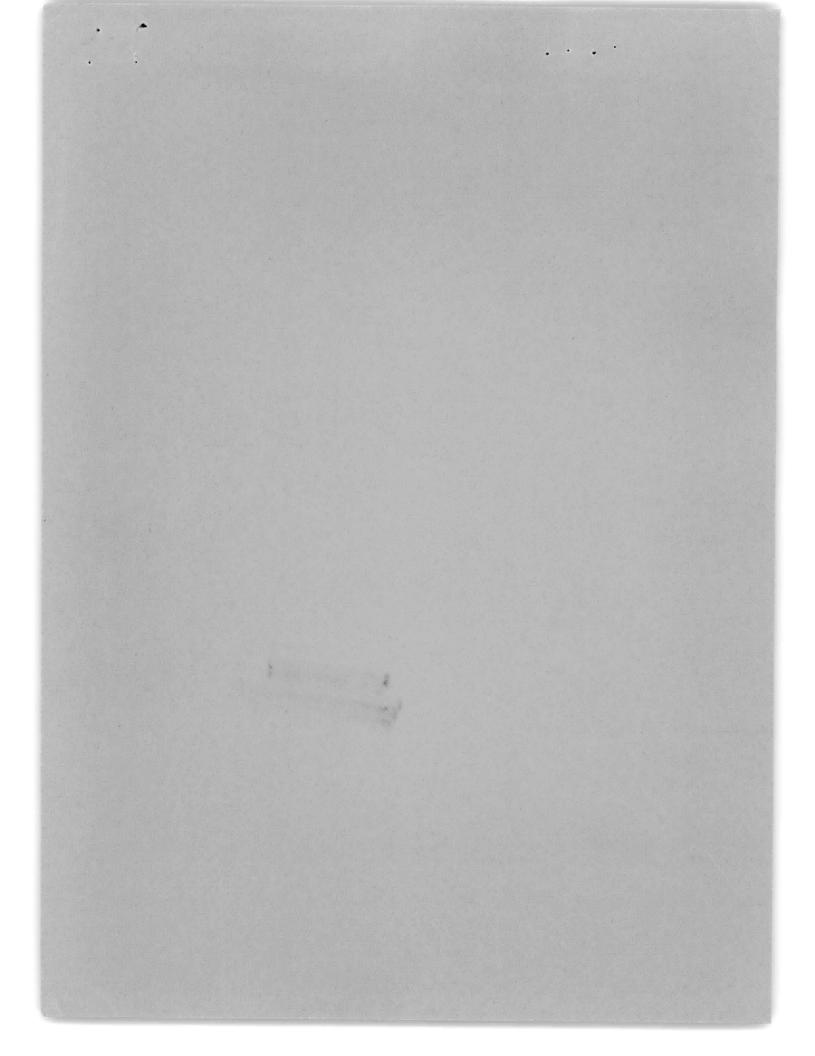

#### **ERRATA SHEET**

for

#### David Taylor Model Basin Report 1065

Page 4, Equation [6d]: Change to read

$$f_4(x) = \frac{f_1'''(x)}{2\alpha^3} = -2\left\{\alpha^2\beta^2\left[\sinh K_1 x \sin K_2(l-x) - \sinh K_1(l-x) \sin K_2 x\right] - \sqrt{1 + \alpha^4\beta^4}\right\}$$

$$\left[\cosh K_{1}(l-x)\cos K_{2}x - \cosh K_{1}x\cos K_{2}(l-x)\right]$$

Page 17, Equation [38b]: Change to read

$$\sigma_2 = \frac{1}{2(1-\nu+\nu^2)} \left[ -\frac{Ey_1(l_1)}{R} (1-2\nu) + \sqrt{4\sigma_y^2(1-\nu+\nu^2) - 3\left(\frac{Ey_1(l_1)^2}{R}\right)} \right]$$

M1951) UN. 2 M

· · · · · ·		~ ,.
•		,
		•

### DEPARTMENT OF THE NAVY DAVID TAYLOR MODEL BASIN

WASHINGTON 7, D.C.

IN REPLY REFER TO 5605 (141:BDT:jh) 17 May 1960

Commanding Officer and Director From:

To: Distribution List

Subj: David Taylor Model Basin technical report; correction to

Encl: (1) Errata Sheet for TMB Report 1065

1. It is requested that all copies of Taylor Model Basin Report 1065, which were distributed as indicated below, be corrected in accordance the changes in the enclosure.

> M. L. DAGER By direction

1 11 Dager

Copy with copies of Encl (1) as indicated to: BuShips, Code 106, 1 copy 335, 1 copy 11 420, 1 copy 421, 1 copy 423, 1 copy Ħ 440, 1 copy 442, 4 copies 443, 1 copy 525, 1 copy 633, 1 copy CHONR, Mech Br, Code 438, 2 copies CNO, Op 373, 1 copy CDR, USNOL, 1 copy DIR, USNRL, Attn: TID, 1 copy NAVSHIPYD PTSMH, 2 copies NAVSHIPYD MARE, 2 copies NAVSHIPYD NORVA, Attn: UERD, Code 280, 1 copy SUPSHIPINSORD, Groton, 1 copy Electric Boat Division, General Dynamics Corporation, 1 copy SUPSHIPINSORD, Newport News, 1 copy Newport News Shipbuilding and Dry Dock Company, 1 copy SUPSHIPINSORD, Pascagoula, 1 copy



Copies to (Cont'd) Ingalls Shipbuilding Corporation, 1 copy Assistant Secretary of Defense, Research and Engineering, Attn: Technical Library, 1 copy GO, USNAVADMINU & USNROTC, MIT, 1 copy in C, PGSCOL, Webb, 1 copy New York Shipbuilding Corporation, Camden, 1 copy Republic Aviation Corporation, New York, 1 copy Caterpillar Tractor Company, Peoria, 1 copy American Standard Company, Norwood, 1 copy Mr. H. Saunders, General Electric Company, Philadelphia, 1 copy Forrestal Research Center, Princeton University, New Jersey, Attn: Mr. Attn: Mr. Maurice Smith, 1 copy Carnegie Institute of Technology, Pittsburgh, 1 copy Hydro-Og Aerodynamiks Laboratorium, Denmark, 1 copy University of Alabama, Attn: Mr. W. D. Jordan, 1 copy Mr. Wesley D. Wheeler, Port Chester, 1 copy American Car and Foundry Company, New York, 1 copy University of Illinois, Urbana, 2 copies, 1 copy for Mr. Newmark Transportation Technical Research Institute, Japan, 1 copy Stiftelsen For Skeppsbyggnadsteknisk Forskning, Sweden, 1 copy Lessell and Associates, Incorporated, Boston, 1 copy University of California, Department of Naval Architecture, Berkeley, 1 copy George G. Sharp, Incorporated, New York, 1 copy Maritime College, New York, 1 copy University of Michigan, Ann Arbor, 1 copy Edo Corporation, Attn: Mr. Kaplan, 1 copy Professor Cheung Hun Kim, Seoul National University, Korea, 1 copy Projektkontort SPO, Sweden, 1 copy University of Florida, Gainesville, 4 copy Polytechnical Institute of Brooklyn, 1 copy Florida Research and Development Center, Pratt and Whitney Aircraft, 1 copy The University of Glasgow, Scotland, 1 copy Avco Research and Advanced Development, Massachusetts, 1 copy Mr. S. Logan Kerr, Pennsylvania, 1 copy Chicago Bridge and Iron Company, Attn: Mr. Zick, 1 copy Loewy-Hydropress Division, New York, Attn: Mr. E. Kramer, 1 copy New York University, 1 copy Rice Institute, Houston, 1 copy The John Crerar Library, Chicago, 1 copy

• 1		* .
		* *

## DEPARTMENT OF THE NAVY DAVID TAYLOR MODEL BASIN WASHINGTON 7, D.C.

SS/S11 A9/1 (710:MCC:1g) Ser 7-173 26 June 1959

From: Commanding Officer and Director

To: Chief, Bureau of Ships (312) (in duplicate)

Subj: Stresses in stiffened cylinders near discontinuities; forwarding of report on

Encl: (1) TMB Report 1065 entitled, "Analysis for Determining Stresses in Stiffened Cylindrical Shells near Structural Discontinuities" 3 copies

1. It has been observed in tests of stiffened cylindrical shells that failure by axisymmetric yielding almost invariably occurs in the full-length bay nearest a bulkhead or heavy frame. In enclosure (1) a procedure is developed for computing axisymmetric stresses near these discontinuities. The results of this analysis indicate that stresses higher than those predicted by a standard computation will usually exist near discontinuities. A method of reducing this effect by modifying the geometry near these points is also presented in enclosure (1). The adequacy of this analysis has been verified by experiment; the experimental results will be presented in TMB Report 1326, now in the process of preparation.

E.E. Johnson

By direction

		•
•		

```
SS/S11
A9/1
(710:MCC:1g)
Ser 7-173
26 June 1959
```

```
Copy to:
CHONR, Mech Br (438) (with 2 copies of encl (1))
CNO, Op 373 (with 1 copy of encl (1))
CDR, USNOL (with 1 copy of encl (1))
DIR, USNRL, Attn: TID (with 1 copy of encl (1))
NAVSHIPYD PTSMH (with 2 copies of encl (1))
NAVSHIPYD MARE (with 2 copies of encl (1))
NAVSHIPYD NORVA, Attn: UERD (Code 280) (with 1 copy of encl (1))
SUPSHIPINSORD, Groton (with 1 copy of encl (1))
Elec Boat Div, General Dynamics Corp. (with 1 copy of encl (1))
SUPSHIPINSORD, Newport News (with 1 copy of encl (1))
NNS & DD Co. (with 1 copy of encl (1))
SUPSHIPINSORD, Pascagoula (with 1 copy of encl (1))
Ingalls Shipbldg Corp. (with 1 copy of encl (1))
ASST SECDEF R and E, Attn: Tech Library (with 1 copy of encl (1))
CO, USNAVADMINU MIT (with 1 copy of encl (1))
O in C, PGSCOL, Webb (with 1 copy of encl (1))
```



# ANALYSIS FOR DETERMINING STRESSES IN STIFFENED CYLINDRICAL SHELLS NEAR STRUCTURAL DISCONTINUITIES

by

Robert D. Short and Robert Bart

Report 1065 NS 731-038

June 1959

#### TABLE OF CONTENTS

	Page
ABSTRACT	1
INTRODUCTION	1
ELASTIC STRESSES IN FINITE CYLINDER	1
OPTIMUM DESIGN FOR END BAY	10
DISCUSSION	14
ACKNOWLEDGMENT	15
APPENDIX A – BOUNDARY CONDITIONS AND SPECIFIC PROBLEMS	16
Symmetrical Heavy Frame or Bulkhead	16
Intersections	20
APPENDIX B - NUMERICAL EXAMPLE	21
REFERENCES	24

### **NOTATION**

$A_{F}$	Area of frame
$A_1, A_2, A_3, A_4$	Integration constants
B	Bay matrix; see Equation [8]
b	Faying width of frame
D	$\frac{Eh^3}{12(1-\nu^2)}$
E	Young's modulus
F	Frame matrix
$f_1, f_2, f_3, f_4$	Deflection functions
g <sub>1</sub> , g <sub>2</sub> , g <sub>3</sub> , g <sub>4</sub>	Deflection functions
H =	$(A_F + bh) \sqrt{1 + \alpha^2 \beta^2} \sinh K_1 l + \sqrt{1 - \alpha^2 \beta^2} \sin K_2 l +$
	$\frac{2h}{\alpha} \sqrt{1 - \alpha^4 \beta^4} \left( \cosh K_1 l - \cos K_2 l \right)$
h	Shell thickness
I	Moment of inertia of frame section about radial axis
$K_{1}$	$\alpha \sqrt{1-\alpha^2\beta^2}$
K <sub>2</sub>	$\alpha \sqrt{1+\alpha^2\beta^2}$
L	Center-to-center distance of frames
l	Clear distance between frames
M	Longitudinal bending moment in shell
P	Pressure
$P_{c}$	Collapse pressure
R	Radius to middle surface of shell
$R_{F}$	Radius to center of gravity of frame section
8	Bay matrix; see Equation [11]
T	$-\frac{2h\sigma_1}{P_cR}$
v	Longitudinal shear stress in shell
$oldsymbol{x}$	Distance along shell generator
y	Radial deflection of shell

$$y_u = \frac{PR^2}{2Eh} (2 - \nu)$$

$$\frac{3(1-\nu^2)}{R^2h^2}$$

$$\beta^2$$
 
$$\frac{PR^3}{2E\hbar}$$

δ Differential shear function

ν Poisson's ratio

 $\sigma$  Stress

 $\phi_1, \phi_2, \phi_3, \phi_4$  Functions defined by Equations [41], [44], [46], and [48], respectively

#### **ABSTRACT**

Recent developments in structural research on circular ring-stiffened cylinders subjected to hydrostatic pressure have indicated that refinements of the standard strength analysis are required to account for the effects of discontinuities such as a heavy frame or bulkhead or variations in shell thickness. A procedure has been developed for computating axisymmetric stresses near these discontinuities in a cylinder in which the thickness of the material does not vary between a pair of stiffeners but may change from one side of a stiffener to the other. The results of this analysis indicate that stresses higher than those predicted by a standard computation will usually exist near these discontinuities. A method of reducing this effect by modifying the geometry near these points is also presented.

#### INTRODUCTION

The strength of thin-walled, stiffened, cylindrical shells against axisymmetric yielding is usually computed from an elastic analysis of Von Sanden and Gunther. This analysis gives the stress distribution in the shell, and collapse is assumed to occur when the stresses at the middle of a bay exceed the yield point of the material. A more recent analysis developed by Salerno and Pulos<sup>2</sup> accounts for the longitudinal moments resulting from the end pressure together with the radial deflection of the shell and, therefore, gives more accurate stresses. Although neither of these analyses indicates any difference in strength between bays, it has been observed experimentally that failure by axisymmetric yielding almost invariably occurs in the full-length bay nearest a bulkhead or heavy frame. To determine the effect of end conditions on the stresses in the shell, a modified Salerno and Pulos analysis is derived which takes into account variable frame spacing and size and changes in shell thickness; it can be easily extended to variations in radius between adjacent bays.

To offset the weakening effect of the heavy member, it has become customary to reduce the spacing of the first frame from this member. This practice, however, merely forces the weakening effect of the heavy member into the next bay without appreciably increasing the collapse pressure. Since it is usually undesirable to reduce the length of more than one bay, another method to increase the strength of the end bays is proposed in this report.

#### ELASTIC STRESSES IN FINITE CYLINDER

The theory of Salerno and Pulos assumes an infinite closed cylinder composed of a linearly elastic material of uniform thickness and radius reinforced by equally spaced, equal-sized frames and subjected to hydrostatic pressure. A typical bay of this cylinder illustrating

<sup>&</sup>lt;sup>1</sup>References are listed on page 24.

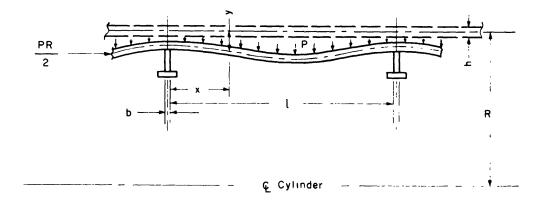


Figure 1 - Typical Bay of the Salerno and Pulos Cylinders

the initial and deformed shapes is shown in Figure 1.

The deformation defined by the radial deflection y as a function of x must satisfy the differential equation

$$\frac{d^4y}{dx^4} + \frac{12(1-\nu^2)PR}{2Eh^3} \frac{d^2y}{dx^2} + \frac{12(1-\nu^2)}{R^2h^2} \left[ y - \frac{PR^2}{Eh} (1-\nu/2) \right] = 0$$
 [1]

where E is Young's modulus,  $\nu$  is Poisson's ratio, and the other terms are defined in Figure 1. Setting

$$\alpha^4 = \frac{3(1-\nu^2)}{R^2h^2}$$
,  $\beta^2 = \frac{PR^3}{2Eh}$ , and  $y_u = \frac{PR^2}{2Eh}(2-\nu)$ 

this simplifies to\*

$$y^{IV} + 4\alpha^4 \beta^2 y'' + 4\alpha^4 (y - y_u) = 0$$
 [2]

Note that  $y_u$  is the deflection which would occur if the stiffening frames were not present. One form of the general solution of Equations [1] or [2] is

$$y = A_{1} \cosh K_{1}x \cos K_{2}x + A_{2} \sinh K_{1}x \sin K_{2}x + A_{3} \cosh K_{1}x \sin K_{2}x + A_{4} \sinh K_{1}x \cos K_{2}x + y_{u}$$
 [3a]

where  $K_1 = \alpha \sqrt{1-\alpha^2 \beta^2}$  and  $K_2 = \alpha \sqrt{1+\alpha^2 \beta^2}$ . The derivatives of y are readily obtained in the following form

$$y' = (A_1 K_1 + A_2 K_2) \sinh K_1 x \cos K_2 x + (A_2 K_1 - A_1 K_2) \cosh K_1 x \sin K_2 x$$

$$+ (A_3 K_2 + A_4 K_1) \cosh K_1 x \cos K_2 x + (A_3 K_1 - A_4 K_2) \sinh K_1 x \sin K_2 x$$
 [3b]

<sup>\*</sup>The solution which follows is taken from Reference 3.

$$y'' = [A_{1}(K_{1}^{2} - K_{2}^{2}) + 2A_{2}K_{1}K_{2}] \cosh K_{1}x \cos K_{2}x + [A_{2}(K_{1}^{2} - K_{2}^{2}) - 2A_{1}K_{1}K_{2}] \sinh K_{1}x \sin K_{2}x + [A_{3}(K_{1}^{2} - K_{2}^{2}) - 2A_{4}K_{1}K_{2}] \cosh K_{1}x \sin K_{2}x + [A_{4}(K_{1}^{2} - K_{2}^{2}) + 2A_{3}K_{1}K_{2}] \sinh K_{1}x \cos K_{2}x$$
[3c]

$$y''' = [A_1 K_1 (K_1^2 - 3K_2^2) + A_2 K_2 (3K_1^2 - K_2^2)] \sinh K_1 x \cos K_2 x + [A_1 K_2 (K_2^2 - 3K_1^2) + A_2 K_1 (K_1^2 - 3K_2^2)] \cosh K_1 x \sin K_2 x + [A_3 K_2 (3K_1^2 - K_2^2) + A_4 K_1 (K_1^2 - 3K_2^2)] \cosh K_1 x \cos K_2 x + [A_3 K_1 (K_1^2 - 3K_2^2) + A_4 K_2 (K_2^2 - 3K_1^2)] \sinh K_1 x \sin K_2 x$$
 [3d]

Let

$$H = (A_F + bh) (\sqrt{1 + \alpha^2 \beta^2} \sinh K_1 l + \sqrt{1 - \alpha^2 \beta^2} \sin K_2 l) + \frac{2h}{\alpha} \sqrt{1 - \alpha^4 \beta^4}$$

$$(\cosh K_1 l - \cos K_2 l)$$
[4]

where  $A_F$  is the area of the frame cross section\* and b is the faying width of the frame. Applying conditions of continuity and equilibrum, Equations [3] for the Salerno and Pulos cylinders may be reduced to:

$$y = y_{u} \left[ 1 - \frac{A_{F}}{H} f_{1}(x) \right]$$
 [5a]

$$\frac{y'}{\alpha} = -y_u \frac{A_F}{H} f_2(x)$$
 [5b]

$$\frac{y''}{2\alpha^2} = -y_u \frac{A_F}{H} f_3(x)$$
 [5c]

$$\frac{y^{\prime\prime\prime}}{2\alpha^3} = -y_u \frac{A_F}{H} f_4(x)$$
 [5d]

where

$$f_{1}(x) = \sqrt{1 - \alpha^{2} \beta^{2}} \left[ \cosh K_{1} x \sin K_{2}(l-x) + \cosh K_{1}(l-x) \sin K_{2} x \right] + \sqrt{1 + \alpha^{2} \beta^{2}}$$

$$\left[ \sinh K_{1} x \cos K_{2}(l-x) + \sinh K_{1}(l-x) \cos K_{2} x \right]$$
[6a]

$$f_2(x) = \frac{f_1'(x)}{\alpha} = 2 \left[ \sinh K_1 x \sin K_2(l-x) - \sinh K_1(l-x) \sin K_2 x \right]$$
 [6b]

$$f_3(x) = \frac{f_1''(x)}{2\alpha^2} = \sqrt{1 - \alpha^2 \beta^2} \left[\cosh K_1 x \sin K_2(l-x) + \cosh K_1(l-x) \sin K_2 x\right] - \sqrt{1 + \alpha^2 \beta^2}$$

$$\left[\sinh K_1 x \cos K_2(l-x) + \sinh K_1(l-x) \cos K_2 x\right]$$
[6c]

<sup>\*</sup>Greater accuracy is obtained by using for  $A_F$  the value obtained by multiplying the true area of the section by  $R/R_F$  where  $R_F$  is the radius of the center of gravity of the frame.

$$f_{4}(x) = \frac{f_{1}^{""}(x)}{2\alpha^{3}} = -2\left\{\alpha^{2}\beta^{2}\left[\sinh K_{1}x\sin K_{2}(l-x) - \sinh K_{1}(l-x)\sin K_{2}x\right] + \sqrt{1-\alpha^{4}\beta^{4}}\right\}$$

$$\left[\cosh K_{1}(l-x)\cos K_{2}x - \cosh K_{1}x\cos K_{2}(l-x)\right]$$
[6d]

In an actual structure, the presence of bulkheads or heavy frames precludes the assumption of one deformation pattern for all bays as assumed in the Salerno and Pulos analysis. However, an approximate relationship can be found by computing y and its derivatives at a distance from the bulkhead in terms of the conditions at the bulkhead and by assuming that these will approach the values computed by a Salerno and Pulos analysis as the distance increases. Basically, symmetric deflection assumptions of Salerno and Pulos are replaced by the matrix equation

$$|B|_{0,S\&P} = |B|_{0,i}$$
 [7]

where

$$|B| = \begin{vmatrix} y \\ \frac{y'}{\alpha} \\ \frac{y'''}{2\alpha^2} \\ \frac{y''''}{2\alpha^3} \\ y_{\mu} \end{vmatrix}$$
 [8]

The subscript 0, i denotes that |B| is to be evaluated at the bulkhead or at a frame (x=0) in the ith bay from the bulkhead, and the subscript 0, S&P denotes values at x = 0 in the infinite cylinder. Since Equation [7] is rarely exactly satisfied,  $|B|_{0,i}$  will be taken such that it is most nearly satisfied by a "least-squares" approximation consistent with the bulkhead conditions.

The basic problem, then, is to determine  $|B|_{0,i}$  in terms of the bulkhead condition  $|B|_{0,1}$ so that Equation [7] and a least-square estimate can be used to determine  $|B|_{0.1}$ . If Equations [3] are evaluated at x = 0, they can be reduced to

$$A_1 = y(0) - y_u$$
 [9a]

<sup>\*</sup>We could as easily have used  $|B|_{l.S\&P} = |B|_{l.i}$ .

$$A_{2} = \left(\frac{y''(0)}{2\alpha^{2}}\right) \left(\frac{1}{\sqrt{1 - \alpha^{4}\beta^{4}}}\right) + (y(0) - y_{u}) \frac{\alpha^{2}\beta^{2}}{\sqrt{1 - \alpha^{4}\beta^{4}}}$$
 [9b]

$$A_{3} = \frac{1}{2} \left[ \left( \frac{y'(0)}{\alpha} \right) \left( \frac{1 + 2\alpha^{2}\beta^{2}}{\sqrt{1 + \alpha^{2}\beta^{2}}} \right) + \left( \frac{y'''(0)}{2\alpha^{3}} \right) \left( \frac{1}{\sqrt{1 + \alpha^{2}\beta^{2}}} \right) \right]$$
 [9c]

$$A_{4} = \frac{1}{2} \left[ \left( \frac{y'(0)}{\alpha} \right) \left( \frac{1 - 2\alpha^{2}\beta^{2}}{\sqrt{1 - \alpha^{2}\beta^{2}}} \right) - \left( \frac{y'''(0)}{2\alpha^{3}} \right) \left( \frac{1}{\sqrt{1 - \alpha^{2}\beta^{2}}} \right) \right]$$
 [9d]

Now, substitution of Equations [9] into Equations [3], which will yield conditions at any point of the bay, gives

$$|B|_{x,i} = |S|_{x,i} \times |B|_{0,i}$$
 when  $x \le l_i$  [10]

where  $|S|_{x,i}$  is defined by Equation [11] on page 6.

The identity equation  $y_u = y_u$ , which holds throughout the bay, is included in Equation [10] for reasons of conformableness which will be apparent later. Replacing x by  $l_1$  and letting i = 1 in Equation [10] gives

$$|B|_{l,1} = |S|_{l,1} \times |B|_{0,1}$$
 [12]

 $|B|_{l,1}$  now denotes the boundary conditions at the end of the bay away from the bulkhead. It is possible to assume that  $|B|_{l,1} = |B|_{l,S\&P}$  and to solve immediately for  $|B|_{0,1}$ . This will not give a very good approximation because  $l_1$  is usually too small. In order to obtain  $|B|_{x,i}$  at a greater distance from the bulkhead, |B| must be found on the other side of the frame. The conditions on both sides of a frame are shown in Figure 2.

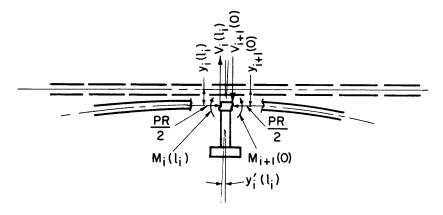


Figure 2 - Loads and Deformations at a Frame

Assuming that the faying width b remains straight, four equations can be obtained from considerations of continuity and equilibrium. Obviously

$$y_{i+1}(0) = y_i(l_i) + b y_i'(l_i)$$
 [13a]

$$y_{i+1}(0) = y_{i}(l_{i})$$
 [13b]

Equilibrium of vertical forces yields

$$V_{i}(l_{i}) - V_{i+1}(0) - Pb + E\left[\frac{y_{i}(l_{i}) + y_{i+1}(0)}{2R}\right] \cdot \left(\frac{A_{F} + bh}{R}\right) \cdot \left(\frac{\nu PR}{2}\right) \left(\frac{\dot{b}}{R}\right) = 0[13c]$$

Moment equilibrium yields

$$M_{i}(l_{i}) - M_{i+1}(0) + \frac{b}{2} \left[ V_{i}(l_{i}) + V_{i+1}(0) \right] - y_{i}'(l_{i}) \frac{E\left(I_{F} + \frac{b^{3}h}{12}\right)}{R^{2}} = 0$$
 [13d]

where  $I_F^*$  is the moment of inertia of the frame about the vertical (radial) axis. It should be noted that h may be selected from either bay as long as  $A_F^{} + bh$  represents the total area of frame and faying width of shell and  $I_F^{} + (b^3h/12)$  represents the total moment of inertia about the radial centerline. The moments and shears are obtained in terms of y'' and y''' by the relations

$$M = -Dy''. ag{14}$$

$$V = -Dy^{\prime\prime\prime}$$
 [15]

where  $D = \frac{Eh^3}{12(1-\nu^2)}$  for a cylinder.

Substituting these expressions into Equations [13] and rearranging gives:

$$|B|_{0, i+1} = |F|_{i, i+1} \times |B|_{l,i}$$
 [16]

where

<sup>\*</sup>Greater accuracy is obtained by using for  $I_F$  the value obtained by multiplying the true I of the section  $\frac{R}{R_F}$ .

The double subscript i, i + 1 indicates a frame between i and i + 1 bays from the bulkhead. Equation [16] includes the identity equation

$$(y_u)_{i+1} = (y_u)_i \frac{(y_u)_{i+1}}{(y_u)_i}$$

and allows the shell parameters (except radius) to change.

Substitution of Equation [11] into Equation [16] gives

$$|B|_{0,i+1} = |F|_{i,i+1} \times (|S|_{1,i} \times |B|_{0,i})$$
 [18]

By repeated application of Equation [18] we may obtain

$$|B|_{0,i+m} = |F|_{i+m-1,i+m} \times |S|_{l,i+m-1} \times \dots \times |F|_{i,i+1} \times |S|_{l,i} \times |B|_{0,i}^*$$
 [19]

For i = 1 Equation [19] may be shortened to

$$|B|_{0,m+1} = |F,S|_{m+1,1} \times |B|_{0,1}$$
 [20]

where  $|F,S|_{m+1,1}$  is the product of the |F| and |S| matrices in the order of Equation [19] for all frames and bays between the (m+1) bay and the bulkhead. Now if the product for matrix  $|F,S|_{m+1,1}$  ends with at least two consecutive identical bays, Equation [7] will be very nearly satisfied by i=m+1. Almost all problems of practical interest can be carried far enough to satisfy this condition, and it will be assumed hereafter that  $|F,S|_{m+1,1}$  does in fact terminate at such a point. Substituting Equation [20] into Equation [7] gives

$$|B|_{0.5\&P} = |F,S|_{m+1.1} \times |B|_{0.1}$$
 [21]

As previously noted this is not exactly true, but a least-squares process can be used to estimate two of the bulkhead conditions if the other two are given. Any pair may be used as the knowns, but y and y will be used here because they are the most readily evaluated at a bulkhead at pressures sufficiently high to cause yielding at the bulkhead.\*\* Setting

$$\left(\frac{y'}{\alpha}\right)_{0,1} = u, \left(\frac{y'''}{2\alpha^3}\right)_{0,1} = v$$

<sup>\*</sup>m now indicates the number of frames from any starting bay i.

<sup>\*\*</sup>See Appendix A.

and neglecting the identity equation, Equation [21] reduces to

$$\alpha_1 u + \beta_1 v + \gamma_1 = 0$$
 [22a]

$$\alpha_2 u + \beta_2 v + \gamma_2 = 0$$
 [22b]

$$\alpha_3 u + \beta_3 v + \gamma_3 = 0$$
 [22c]

$$\alpha_A u + \beta_A v + \gamma_A = 0$$
 [22d]

The method of least-squares shows that u and  $\nu$  are given by

$$u = \frac{\sum \alpha \beta \sum \beta \gamma - \sum \alpha \gamma \sum \beta^2}{\sum \alpha^2 \sum \beta^2 - (\sum \alpha \beta)^2}$$
 [23]

$$v = \frac{\sum \alpha \beta \sum \alpha \gamma - \sum \beta \gamma \sum \alpha^{2}}{\sum \alpha^{2} \sum \beta^{2} - (\sum \alpha \beta)^{2}}$$
 [24]

Combining u and v with the known values y,  $y''/2\alpha^2$ , and  $y_u$  gives the complete column matrix  $|B|_{0,1}$ , and the column matrix  $|B|_{0,i}$  at any other frame is then found by multiplication by the  $|F,S|_{i,1}$  matrix. Equation [10] then completely determines the deformations, and hence the stresses, in any bay.

#### OPTIMUM DESIGN FOR END BAY

The analysis of the previous section is applicable to an axially symmetric structure composed of circular cylindrical bays with a common axis and radius. The length of bay, thickness of shell, and Young's modulus may vary from bay to bay; the size of stiffeners may also change.

In actual practice, however, all these parameters are usually constant except for isolated interruptions such as bulkheads, heavy frames, and conical reducer sections. Analyses made on several cylinders in the range of current submarine design indicate that there is usually a bay near any bulkhead or other variation of geometry which has larger elastic circumferential membrane stresses than those bays farther from the bulkhead. The following design method has been developed to eliminate this weakness.

For this design procedure a long, ring-stiffened cylinder of uniform geometry composed of a ductile material and terminating at a relatively rigid bulkhead or other discontinuity is assumed. It is desired that the stress pattern caused by the bulkhead shall not cause any bay to be weaker than a bay more distant from the bulkhead. It is apparent that, if Equation [21] is exactly satisfied for some m, then all subsequent bays will have the Salerno and Pulos<sup>1</sup>

stress distribution. To satisfy Equation [21], two additional parameters are required. If they are selected from the geometry of the first bay and first frame, and Equation [21] can be satisfied for m=1, the stress pattern of the second and all subsequent bays will be identical. The length  $l_1$  of the first bay and the area  $A_{F_1}$  of the first frame are selected as the parameters to be determined. Since stresses are nonlinear functions of pressure, this determination should be made for  $P=P_c$ , the expected collapse pressure.

It is more convenient now to select the origin, x = 0, of the first bay at the first frame, while the origin for the second or typical bay will remain as it was. The nomenclature for this case is shown in Figure 3.

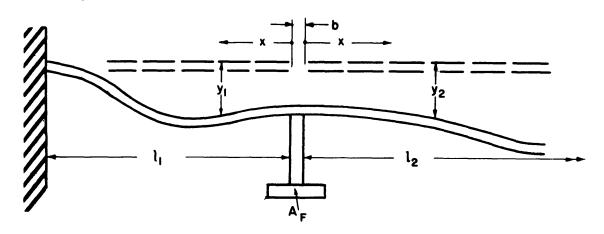


Figure 3 - Nomenclature for End Bay Design

At the right of the frame we set

$$|B|_{0,2} = |B|_{0,S\&P}$$
 [25]

From Equation [16]

$$|B|_{0,1} = |F^*|_{2,1} \times |B|_{0,2}$$
 [26]

where  $|F^*|_{2,1}$  is identical to  $|F|_{2,1}$  with the second and fourth columns multiplied by (-1). Since  $y'_{S&P}(0) = 0$ , substituting Equation [25] into Equation [26] and rearranging yields

$$y_1(0) - y_{SRP}(0) = 0$$
 [27a]

$$\frac{y_1'(0)}{\alpha} = -\frac{y_{S_{b}P}(0)}{\alpha} = 0$$
 [27b].

$$\frac{y_{1}''(0)}{2\alpha^{2}} - \frac{y_{S\&P}'(0)}{2\alpha^{2}} = -(b\alpha)^{2} \frac{A_{F} + bh}{bh} y_{S\&P}(0) - (b\alpha) y_{S\&P}''(0) + (b\alpha)^{2} y_{u}$$
 [27c]

$$\frac{y_{1}^{""}(0)}{2a^{3}} - \frac{y_{S\&P}^{"}(0)}{2a^{3}} = -2(ba)\frac{A_{F} + bh}{bh}y_{S\&P}(0) - 2y_{S\&P}^{"}(0) + 2(ba)y_{u}$$
 [27d]

It is now convenient to define  $\delta$  and  $\Delta V$  as follows:

$$\delta = \frac{\Delta V}{4\sigma^3 D} = \frac{V_1(0) - V_{S_{\delta_6}P}(0)}{4\sigma^3 D}$$
 [28]

whence Equations [27c] and [27d] may be written as

$$\frac{y_{1}''(0)}{2\alpha^{2}} - \frac{y_{S\&P}'(0)}{2\alpha^{2}} = -(b\alpha)\delta$$
 [27c']

$$\frac{y_1'''(0)}{2\alpha^3} - \frac{y_{S\&P}''(0)}{2\alpha^3} = -2\delta$$
 [27d']

The difference between Equation [10] for Bay 1 and Equation [10] for Bay 2 is

$$|B|_{x,1} - |B|_{x,2} = |S|_{x,i} \times |B|_{0,1} - |B|_{0,2}$$
 [29]

since under the assumptions of this section  $|S|_{x,i}$  is the same for all bays. From Equations [27]

$$|B|_{0,1} - |B|_{0,2} = \begin{vmatrix} 0 \\ 0 \\ -(b\alpha)\delta \\ -2\delta \\ 0 \end{vmatrix}$$
 [30]

and, for 
$$x = l_1$$
, Equation [29] becomes 
$$|B|_{l_1, 1} - |B|_{l_1, 2} = |S|_{l_1, i} \times \begin{vmatrix} 0 \\ 0 \\ -(b\alpha)\delta \\ -2\delta \\ 0 \end{vmatrix}$$
 [31]

Now, since  $|S|_{l_1,i}$  and  $|B|_{l_1,2}$  are completely known from the geometry and Equations [11] and [5], respectively, and since there must exist two boundary relations on  $|B|_{l_1,1}$ ,\* Equation [31] represents four equations in the two unknown boundary conditions and the two parameters  $l_1$  and  $\delta$ . Equation [28] defines  $\delta$  as a function of the difference between the shear on one side of the first frame and that on the other side. This indicates that the area of the first frame

<sup>\*</sup>This subject is discussed in Appendix A.

must be altered to maintain the assumed conditions. Since the S&P frame is in equilibrium except for the load  $\Delta V$ , a corresponding  $\Delta A_{F_1}$  is computed from the equilibrium expression

$$\Delta A_{F_1} = \frac{\Delta V R^2}{E y_2(0)} \tag{32}$$

and Equations [5a] and [28] as

$$\Delta A_{F_1} = \frac{\delta h}{\alpha y_u \left[ 1 - \frac{A_F}{H} f_1(0) \right]}$$
 [33]\*

assuming a solution to Equation [31] exists then Equation [31] and the two known boundary relations will completely determine the geometry necessary for the condition that the second and all subsequent bays will have identical stress patterns at the collapse pressure. This is developed in detail in Appendix A. A sample solution is presented in Appendix B.

To determine the strength of the first bay, Equation [29] is written, after substitution of Equation [30], as follows:

$$y_1(x) - y_2(x) = -\delta g_1(x)$$
 [34a]

$$\frac{y_1'(x) - y_2'(x)}{\alpha} = -\delta g_2(x)$$
 [34b]

$$\frac{y_{1}''(x) - y_{2}''(x)}{2\sigma^{2}} = -\delta g_{3}(x)$$
 [34c]

$$\frac{y_1'''(x) - y_2'''(x)}{2\alpha^3} = -\delta g_4(x)$$
 [34d]

where

$$g_1(x) = \frac{\cosh K_1 x \sin K_2 x}{\sqrt{1 + \alpha^2 \beta^2}} - \frac{\sinh K_1 x \cos K_2 x}{\sqrt{1 - \alpha^2 \beta^2}} + (b\alpha) \frac{\sinh K_1 x \sin K_2 x}{\sqrt{1 - \alpha^4 \beta^4}}$$
[35a]

<sup>\*</sup>The actual additional area required will, of course, be given by  $\left( \Delta A_F \right) \left( \frac{R_{F_1}}{R} \right)$ .

$$g_{2}(x) = \frac{g_{1}'(x)}{\alpha} = \frac{2 \sinh K_{1} x \sin K_{2} x}{\sqrt{1 - \alpha^{4} \beta^{4}}} + (b\alpha) \left( \frac{\cosh K_{1} x \sin K_{2} x}{\sqrt{1 + \alpha^{2} \beta^{2}}} + \frac{\sinh K_{1} x \cos K_{2} x}{\sqrt{1 - \alpha^{2} \beta^{2}}} \right)$$
[35b]

$$g_{3}(x) = \frac{g_{1}''(x)}{2\alpha^{2}} = \frac{\cosh K_{1} x \sin K_{2} x}{\sqrt{1 + \alpha^{2} \beta^{2}}} + \frac{\sinh K_{1} x \cos K_{2} x}{\sqrt{1 - \alpha^{2} \beta^{2}}} + b\alpha \left(\cosh K_{1} x \cos K_{2} x\right)$$
$$-\frac{\alpha^{2} \beta^{2}}{\sqrt{1 - \alpha^{4} \beta^{4}}} \quad \sinh K_{1} x \sin K_{2} x\right)$$
[35c]

$$g_{4}(x) = \frac{g_{1}'''(x)}{2\alpha^{3}} = 2 \cosh K_{1} x \cos K_{2} x - \frac{2\alpha^{2}\beta^{2}}{\sqrt{1 - \alpha^{4}\beta^{4}}} \sinh K_{1} x \sin K_{2} x$$

$$+ b\alpha \left(\frac{1 - 2\alpha^{2}\beta^{2}}{\sqrt{1 - \alpha^{2}\beta^{2}}} \sinh K_{1} x \cos K_{2} x - \frac{1 + 2\alpha^{2}\beta^{2}}{\sqrt{1 + \alpha^{2}\beta^{2}}} \cosh K_{1} x \sin K_{2} x\right) \quad [35d]$$

For cylinders of interest here, it will be true that  $y_1(l_1) < y_2(l_1)$ ,  $y_1^{"}(l_1) > y_2^{"}(l_1)$ , and  $l_1 < \frac{3.5}{K_2}$ . If this is so, then  $g_1(x) > 0$  for  $0 < x \le l_1$  and  $g_3(x) > 0$  near the middle of the bay. Thus the maximum longitudinal stress near the middle of the first bay will be somewhat higher than that of a typical bay. However, the average and also the maximum circumferential membrane stresses of the first bay are less than those of all subsequent bays. Hence the first bay should withstand a higher pressure than the typical bays.

#### DISCUSSION

The analysis of this report is, of course, limited to small deflections in axially symmetric, thin-walled cylinders. Therefore, cylinders with the ends designed by the method outlined here which fail by an axisymmetric shell yield should have the maximum obtainable strength. It is logical, also, to expect such cylinders which fail by shell instability to have at least as high a collapse pressure as can be obtained with any other end design.

In applying the analysis of this report, there are a few points to be remembered. This analysis, which is analogous to the Salerno and Pulos solution for the infinite stiffened cylinders, gives results which are nonlinear functions of pressure. Familiarity with the Salerno and Pulos solution should not be allowed to lead one to believe that this nonlinearity is negligible, since the variation in deflection near a rigid or nearly rigid bulkhead may easily be five or six times that in a bay remote from the bulkhead, thus greatly magnifying the "beam-column" effect. In addition, at pressures near collapse there will be a change of boundary conditions due to higher local bending stresses near the bulkhead which produce a "plastic hinge" at a pressure

well below that which causes collapse of the cylinder. Both of these nonlinear effects are even more important where an outward negative deflection is expected, such as at the juncture of a cylinder with the large end of a cone. For these reasons caution must also be exercised in interpretation of experimental strain data from a cylinder designed by the methods presented here, since the data taken at low pressures will always show greater strains near the middle of the second bay than in any other bay. It is only when the pressure nears the collapse pressure that the strains in the second bay will approach those of subsequent bays.

#### **ACKNOWLEDGMENT**

The authors wish to acknowledge the contributions of Dr. M.E. Lunchick in checking the equations and reviewing the report.

#### APPENDIX A

#### BOUNDARY CONDITIONS AND SPECIFIC PROBLEMS

The usefulness of this analysis in design is, of course, limited by the ability of the designer to estimate boundary conditions. Although it is not necessary that the boundary condition be known absolutely, an attempt should be made to limit the sum of the absolute values of the errors in each of the pair of  $y_1(l_1)$ ;  $\frac{y_1''(l_1)}{\alpha}$ ;  $\frac{y_1'''(l_1)}{2\alpha^2}$ ;  $\frac{y_1''''(l_1)}{2\alpha^3}$  which are used to 5 percent of  $y_u$ . Although it will usually be necessary for the designer to exercise judgment in selecting proper boundary values, a few more common cases will be discussed here. In all the examples that follow it will be assumed that the material is ductile and of the ideally plastic type. In other words, it has a stress-strain curve which can be approximated by a linear elastic curve terminating in a well-defined plateau-type yield.\* It will be assumed that, for these cases, only  $l_1$  and  $A_{F_1}$  can be varied to attain the maximum collapse pressure.

#### SYMMETRICAL HEAVY FRAME OR BULKHEAD

By a bulkhead is meant a structure for which it may be assumed that all deflections are zero, i. e.,  $y_1(l_1) = 0$ . It is, therefore, only a special case of a heavy frame located so that it may be assumed to be symmetrically loaded. For the heavy frame there are two possibilities to consider; (1) a "plastic hinge" is formed in the shell at the frame, or (2) partial or no yielding occurs near the frame prior to collapse. Since in case (1) only local yielding will occur, it is assumed for the first case that the tangent to a generator will rotate at the bulkhead or heavy frame i. e.,  $y_1'(l_1) \neq 0$ . For the second case it is assumed that no rotation occurs and  $y_1'(l_1) = 0$ .

For the first case, then, two conditions at the frame are known. The first, which comes from equilibrium (see Equation [13c]) and symmetry (i.e., equal deflections and shear forces on either side of the frame), is

$$-\frac{y_1'''(l_1)}{2\alpha^3} + b_0 \alpha \frac{(A_F + bh)_0}{b_0 h} y_1 (l_1) - b_0 \alpha y_u - 2 \alpha^2 \beta^2 \frac{y_1'(l_1)}{\alpha} = 0$$
 [36]

Here the subscript 0 refers to the heavy frame. The second condition is based on the maximum strength of the material at the frame which occurs under the assumed equilibrium stress distribution of Figure 4. It is  $P_c R$ 

$$\frac{y_{1}^{"}}{2\alpha^{2}}(l_{1}) = h \frac{\alpha^{2}\beta^{2}}{2} \left( \frac{2h\sigma_{1}}{P_{c}R} + \frac{P_{c}R}{2h\sigma_{1}} \right) \left[ 1 - \left( \frac{1 + \frac{l_{c}R}{2h\sigma_{1}}}{1 - \frac{P_{c}R}{2h\sigma_{1}}} \right) \left( \frac{\sigma_{1} + \sigma_{2}}{\sigma_{1} - \sigma_{2}} \right) \right] [37]$$

<sup>\*</sup>Other types of material are beyond the scope of this report.

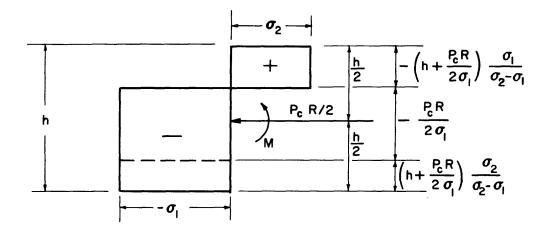


Figure 4 - Assumed Stress Condition at Formation of Plastic Hinge

If shear stresses are neglected, the Hencky-Von Mises criterion of yielding gives:

$$\sigma_{1} = \frac{1}{2(1-\nu+\nu^{2})} \left[ -\frac{Ey_{1}(l_{1})}{R} (1-2\nu) - \sqrt{4\sigma_{y}^{2}(1-\nu+\nu^{2}) - 3\left(\frac{Ey_{1}(l_{1})}{R}\right)^{2}} \right] [38a]$$

$$\sigma_{2} = \frac{1}{2(1-\nu+\nu^{2})} \left[ -\frac{Ey_{1}(l_{1})}{R} (1-2\nu) + \sqrt{4\sigma_{y}^{2}(1-\nu+\nu^{2}) - 3\left(\frac{Ey_{1}(l_{1})}{R}\right)^{2}} \right] [38b] \underset{evrsts}{\text{Rel}} \text{ shet.}$$

where  $\sigma_y$  is the yield stress in a one-dimensional stress field (assumed to be the same in tension and compression). Since  $\sigma_1$  and  $\sigma_2$  are nonlinear functions of  $y_1(l_1)$ , it is easier to make a preliminary estimate of  $y_1(l_1)$  and then to compute these stresses directly. Stresses so obtained will usually be sufficiently accurate.

Combining Equations [36], [34a], [34b], [34d], and [5] with  $x = l_1$  gives:

$$y_{u} \left\{ 1 - \frac{A_{F}}{H} f_{1}(l_{1}) + \frac{h}{\alpha (A_{F} + bh)_{0}} \left[ \frac{A_{F}}{H} \left( 2 \alpha^{2} \beta^{2} f_{2}(l_{1}) + f_{4}(l_{1}) \right) - b_{0} \alpha \right] \right\} = \delta \left\{ g_{1}(l_{1}) - \frac{h}{\alpha (A_{F} + bh)_{0}} \left[ 2 \alpha^{2} \beta^{2} g_{2}(l_{1}) + g_{4}(l_{1}) \right] \right\}$$
[39]

Combining Equation [37] with Equations [34c] and [5c] gives:

$$y_{u} \left\{ \frac{\sqrt{3(1-\nu^{2})}}{2(2-\nu)} \left( T - \frac{1}{T} \right) \left[ 1 - \left( \frac{T-1}{T+1} \right) \left( \frac{\sigma_{1} + \sigma_{2}}{\sigma_{1} - \sigma_{2}} \right) \right] + \frac{A_{F}}{H} f_{3}(l_{1}) \right\} = -\delta g_{3}(l_{1}) \quad [40]$$

where  $T = -2 h\sigma_1/P_c R$ . Elimination of  $\delta$  from Equations [39] and [40] yields

$$\phi_{1}(l_{1}) = \frac{\sqrt{3(1-\nu^{2})}}{2(2-\nu)} \left(T - \frac{1}{T}\right) \left[1 - \left(\frac{T-1}{T+1}\right) \left(\frac{\sigma_{1} + \sigma_{2}}{\sigma_{1} - \sigma_{2}}\right)\right] + \left\{1 + \frac{h}{\alpha(A_{F} + bh)_{0}} \left[\frac{A_{F}}{H} \left(2\alpha^{2}\beta^{2}f_{2}(l_{1}) + f_{4}(l_{1})\right) - b_{0}\alpha\right] - \frac{A_{F}}{H} f_{1}(l_{1})\right\} - \frac{g_{3}(l_{1})}{g_{1}(l_{1}) - \frac{h}{\alpha(A_{F} + bh)_{0}} \left(2\alpha^{2}\beta^{2}g_{2}(l_{1}) + g_{4}(l_{1})\right)}\right] + \frac{A_{F}}{H} f_{3}(l_{1}) = 0$$

$$[41]$$

The smallest value of  $l_1$  which satisfies Equation [41] is the desired solution. Since for  $l_1$  near l,  $\phi_1$  is an approximately linearly decreasing function of  $l_1$ , Equation [41] can usually be solved most easily as follows:

Step 1: Compute  $\phi_1(l)$ .

Step 2: If  $\phi_1(l) < 0$ ; compute  $\phi_1(0.9 l)$ . If  $\phi_1(l) > 0$ ; compute  $\phi_1(1.1 l)$ .

Step 3: Compute  $l_1$  by a linear interpolation.\*

If  $\phi_1(l) < 0$ , then

$$l_{1} = \left[1 - \frac{0.1 \,\phi_{1}(l)}{\phi_{1}(l) - \phi_{1}(0.9 \,l)}\right] \, l < l$$
 [42a]

If  $\phi_1(l) > 0$ , then

$$l_{1} = \left[1 + \frac{0.1 \phi_{1}(l)}{\phi_{1}(l) - \phi_{1}(1.1 l)}\right] l > l$$
 [42b]

This process may, of course, be repeated for more accuracy. For the case of partial or no yielding at the heavy frame, we assume  $y_1' \cdot (l_1) = 0$ . It follows from Equation [34b] that Equation [40] can be replaced by

$$y_{u} \frac{A_{F}}{H} f_{2} (l_{1}) = -\delta g_{2} (l_{1})$$
 [43]

<sup>\*</sup>More accuracy may be obtained by computing an intermediate value of  $\phi_1$  and passing a circle through the three values graphically.

Then the expression analogous to Equation [41] is

$$\phi_{2}(l_{1}) = \left\{ 1 + \frac{h}{\alpha(A_{F} + bh)_{0}} \left[ \frac{A_{F}}{H} f_{4}(l_{1}) - b_{0}\alpha \right] - \frac{A_{F}}{H} f_{1}(l_{1}) \right\}$$

$$\left[ \frac{g_{2}(l_{1})}{g_{1}(l_{1}) - \frac{h}{\alpha(A + bh)_{0}} g_{4}(l_{1})} \right] + \frac{A_{F}}{H} f_{2}(l_{1}) = 0$$
[44]

The solution is by the same method as that used for Equation [41]. The correct value of  $l_1$  is then, of course, the smaller of the two values satisfying Equations [41] and [44]. It is obvious that Equation [41] will usually apply to bulkheads and very heavy frames, while Equation [44] will apply to moderately heavy frames. The transition point will vary depending on the geometry of the cylinders and the lighter frames. Having  $l_1$ ,  $\Delta A_{F_1}$  is obtained from Equations [33] and [39] as:

$$\Delta A_{F_{1}} = \frac{\hbar}{\alpha} \left\{ 1 - \frac{A_{F}}{H} f_{1}(l_{1}) + \frac{\hbar}{\alpha (A_{F} + b\hbar)_{0}} \left[ \frac{A_{F}}{H} \left( 2\alpha^{2}\beta^{2} f_{2}(l_{1}) + f_{4}(l_{1}) \right) - b_{0}\alpha \right] \right\}$$

$$\left\{ \left[ 1 - \frac{A_{F}}{H} f_{1}(0) \right] \left[ g_{1}(l_{1}) - \frac{\hbar}{\alpha (A_{F} + b\hbar)_{0}} \left( 2\alpha^{2}\beta^{2} g_{2}(l_{1}) + g_{4}(l_{1}) \right) \right] \right\}^{-1}$$
[45]

For the rigid bulkhead  $\frac{h}{\alpha(A_F + bh)_0}$  is allowed to go to zero in Equations [41] and [45]. Sometimes, where a nearly rigid bulkhead is present, the actual radial deflection of the bulkhead may be known from previous experimental data more accurately than an effective area can be computed. Then it is simply a matter of replacing

$$\frac{\hbar}{\alpha(A_F+b\hbar)_0} \left\{ y_u \left[ b_0 \alpha - \frac{A_F}{\hbar} \left( 2\alpha^2 \beta^2 f_2\left(l_1\right) + f_4\left(l_1\right) \right) \right] - \delta \left[ 2\alpha^2 \beta^2 g_2(l_1) + g_4(l_1) \right] \right\}$$

by  $y_1(l_1)$  in Equation [39]. Then an equation analogous to Equation [41] results:

$$\phi_{3}(l_{1}) = \frac{\sqrt{3(1-\nu^{2})}}{2(2-\nu)} \left(T - \frac{1}{T}\right) \left[1 - \left(\frac{T-1}{T+1}\right) \left(\frac{\sigma_{1}+\sigma_{2}}{\sigma_{1}-\sigma_{2}}\right)\right] + \frac{g_{3}(l_{1})}{g_{1}(l_{1})} \left[1 - \frac{A_{F}}{H} f_{1}(l_{1}) - \frac{y_{1}(l_{1})}{y_{u}}\right] + \frac{A_{F}}{H} f_{3}(l_{1}) = 0$$

$$[46]$$

and Equation [45] is replaced by

$$\Delta A_{F_1} = \frac{h}{\alpha} \left[ 1 - \frac{A_F}{H} f_1(l_1) - \frac{y_1(l_1)}{y_u} \right] \left\{ \left[ 1 - \frac{A_F}{H} f_1(0) \right] g_1(l_1) \right\}^{-1}$$
 [47]

#### INTERSECTIONS

At an axisymmetric intersection of a cylinder with another shell such as a transition cone or an ellipsoidal or hemispherical cap, the simplest method of design is to estimate the deflection at the intersection by some approximate analysis or to compare the proposed structure with available experimental results. Then Equations [46] and [47] can be used, or, for relatively large positive (inward) deflections, Equation [46] should be replaced by a modified Equation [44].

$$\phi_4(l_1) = \frac{g_2(l_1)}{g_1(l_1)} \left[ 1 - \frac{A_F}{H} f_1(l_1) - \frac{y_1(l_1)}{y_u} \right] + \frac{A_F}{H} f_2(l_1) = 0$$
 [48]

Of course, if there is sufficient knowledge of the contiguous shell near the intersection at high pressure, a more detailed analysis can be made from conditions of continuity and equilibrium at the intersection. However, this will usually involve more work than is practical.

#### APPENDIX B

#### NUMERICAL EXAMPLE

A numerical example is provided to illustrate the procedure for designing an end bay and frame. The pertinent scantlings and material properties are

R = 8.4180  in.	$R_F = 8.8464 \text{ in.}$
h = 0.0858  in.	$\nu = 0.30$
l = 1.3217 in.	$E = 3 \times 10^7 \text{ psi}$
b = 0.0443 in.	$\sigma_{\gamma} = 66,400 \text{ psi}$
$4_{\rm E} = 0.0516$ in.	•

The cylinder is closed by a rigid bulkhead  $[y_1(l_1)=0]$ , and  $P_c$  is estimated to be 1000 psi. The computation is facilitated by use of an instruction sheet. The first column of the instruction sheet contains the item number in parentheses. The second column indicates the operation, the result of which is to be recorded in the third column. Numbers in parentheses in the second column are item numbers and indicate that the operation is to be performed on the quantity recorded in that item, e.g., (2) (34) means multiply the quantity in Item 2 by the quantity in Item 34, whereas 2(34) means multiply the number 2 by the quantity in Item 34. The first quantity in Item 84 is always  $\pm$  0.1 depending upon the sign of  $\phi_3(l)$ , Item 83. The subsequent values are entered from the previous interpolation in Item 121. The last value in Item 86 is the correct value of  $l_1$ , and Item 126 contains the ratio  $A_{F_1}/A_F$ . Thus  $L_1$ , the distance from the bulkhead to the center of the first frame, is obtained from  $l_1$  by adding b/2, and  $A_{F_1}$  is obtained by multiplying  $A_F$  by Item 126. In the example which follows the interpolation was carried out three times in order to demonstrate that the first interpolation is sufficiently accurate for design purposes.

End Bay Design Calculation Varying  $L_{\, 1}$  and  $A_{\, F_{\, 1}}$ 

Γ	Item	Operation	Result	Item	Operation	Result
7	(1)	R	8.4180	(44)	(15) (43)/(7)	0.265078
	(2)	h	0.0858	(45)	1-(44)	0.734922
11	(3)	ı	1.3217	(46)	1+(44)	1.265078
	(4)	<i>b R</i>	0.0443	(47)	<b>√</b> (45)	0.857276
	(5)	$A_F \frac{R}{R_F}$	0.0491	(48)	<b>√</b> (46)	1.124757
	(6)	$\nu^{R_F}$	0.3	(49)	(47) (48)	0.964227
	(7)	E	3× 10 <sup>7</sup>	(50)	(3) (42)	1.99906
1	(8)	$\sigma_{\mathbf{y}}$	66,400	(51)	(47) (50)	1.7137
	(9)	$P_{c}^{'}$	1,000	(52)	(48) (50)	2.2485
	(10)	$y_1(l_1)$	0	(53)	cosh (51)	2.86483
	(11)	$(6)^2$	0.09	(54)	sinh (51)	2.68463
	(12)	1-(6)+(11)	0.79	(55)	cos (52)	-0.62701
1	(13)	1-2 (6)	0.4	(56)	sin (52)	0.77901
1	(14)	3-3 (11)	2.73	(57)	(48) (54)	3.01969
1	(15)	<b>√</b> (14)	1.65227	(58)	(47) (56)	0.66785
	(16)	2-(6)	1.7	(59)	(57)+(58)	3.68754
	(17)	(7)(10)/(1)	0	(60)	(58)–(57)	- 2.35 184
	(18)	(17) <sup>2</sup>	0	(61)	(53)–(55)	3.49191
	(19)	(13) (17) / (12)	0	(62)	(49) (61)	3.36699
1	(20)	(8) <sup>2</sup>	44.0896× 10 <sup>8</sup>	(63)	(2) (4)	0.0038
	(21)	(12) (20)	34.8308× 10 <sup>8</sup>	(64)	(5)+(63)	0.0529
	(22)	4(21)-3(18)	139.3232× 10 <sup>8</sup>	(65)	2(2)/(42)	0.11346
	(23)	1/(22)	11.8035×10 <sup>4</sup>	(66)	(59) (64)+(65) (62)	0.57709
	(24)	(23)/(12)	14.9411×10 <sup>4</sup>	(67)	(5)/(66)	0.085082
	(25)	(24)+(19)	14.9411×10 <sup>4</sup>	(68)	(4) (42)	0.067003
	(26)	(1)/(2)	98.112	(69)	(53) (56)/(48)	1.98434
	(27)	(9) (26)	9.8112×10 <sup>4</sup>	(70)	(54) (55)/(47)	- 1.96349
1	(28)	(25)/(27)	1.52286	(71)	(53) (55)	- 1.79623
1	(29)	(28)-1	0.52286	(72)	(54) (56)	2.09153
	(30)	(28)+ 1	2.52286	(73)	(68) (72)/(49)	0.14534
	(31)	(29) (30)/(28)	0.86620	(74)	(44) (72)/(47)	0.64672
	(32)	(19)/(24)	0	(75)	(71)–(74)	- 2.44295
1	(33)	(29) (32)/(30)	0	(76)	(68) (75)	-0.16368
	(34)	1_(33)	1	(77)	(69)-(70)+(73)	4.09317
-	(35)	(31)(34)	0.86620	(78)	(69)+(70)+(76)	-0.14283
	(36)	(15)/(16)	0.97192	(79)	(59) (67)	0.31374
	(37)	(35) (36)/2	0.42094	(80)	(60) (67)	-0.20010
	(38)	(17)/(27)	0	(81)	1-(39)-(79)	0.68626
	(39)	2(38)/(16)	0	(82)	(78) (81)/(77)	-0.02395
	(40)	(1) (2)	0.722264	(83)	(37)+(80)+(82)	0.19689
	(41)	(15)/(40)	2.28763	ll		
	(42)	1/(41)	1.51249	]]		
	(43)	(26) (27)/2	4.81298×10 <sup>6</sup>			
	*D	eta				

Item	Operation		Resi	ılts	
(84)	(121)	-0.1	-0.06974	-0.07035	-0.07033
(85)	1-(84)	1.1	1.06974	1.07035	1.07033
(86)	(3) (85)	-	1.4139	1.4147	1.4147
(87)	(51) (85)	1.8851	1.8332	1.8343	1.8342
(88)	(51) (84)	-0.1714	-0.1195	-0.1206	-0.1205
(89)	(52) (85)	2.4734	2.4053	2.4067	2.4066
(90)	(52) (84)	-0.2249	-0.1568	-0.1582	-0.1581
(91)	cosh (87)	3.3694	3.2069	3.2102	3.2099
(92)	sinh (87)	3.2176	3.0470	3.0505	3.0502
(93)	cosh (88)	1.01472	1.00715	1.00728	1.00727
(94)	sinh (88)	-0.17224	-0.11978	-0.12089	-0.12079
(95)	cos (89)	-0.78494	-0.74096	-0.74190	-0.74183
(96)	sin (89)	0.61957	0.67155	0.67051	0.67059
(97)	cos (90)	0.97482	0.98773	0.98751	0.98753
(98)	sin (90)	-0.22301	-0.15616	-0.15754	-0.15744
(99)	(91) (98)+(93) (96)	-0.12272	0.17556	0.16966	0.17010
(100)	(92) (97)+(94) (95)	3.27178	3.09837	3.10209	3.10177
(101)	(91) (96) / (48)	1.85602	1.91471	1.91372	1.91377
(102)	(92) (95)/(47)	-2.94610	-2.63358	-2.63995	-2.63944
(103)	(91) (95)	-2.64478	-2.37618	-2.38165	-2.38120
(104)	(92) (96)	1.99353	2.04621	2.045399	2.04543
(105)	(68) (104)/(49)	0.13853	0.14219	0.14213	0.14213
(106)	(44) (104) / (47)	0.61642	0.63271	0.63245	-
(107)	(103)-(106)	-3.26120	-3.00889	-3.01410	-
(108)	(68) (107)	-0.21851	-0.20160	-0.20195	-
(109)	(47) (99)	-0.10520	0.15050	0.14545	0.14582
(110)	(48) (100)	3.67996	3.48491	3.48910	3.48874
(111)	(109)+(110)	3.57476	3.63541	3.63455	3.63456
(112)	(109)-(110)	-3.78516	-3.33441	-3.34365	-
(113)	(101)-(102)+(105)	4.94065	4.69048	4.69580	4.69534
(114)	(101)+(102)+(108)	-1.30859	-0.92047	-0.92818	-
(115)	(67) (111)	0.30415	0.30931	0.30923	0.30924
(116)	(67) (112)	-0.32205	-0.28370	-0.28446	-
(117)	1-(39)-(115)	0.69585	0.69069	0.69077	0.69076
(118)	(114) (117)/(113)	-0.18430	-0.13554	-0.13654	-
(119)	(37)+(116)+(118)	-0.08541	0.00170	-0.00006	-
(120)	(83)-(119)	0.28230	0.19519	0.19695	-
(121)	(84) (83)/(120)	-0.06974	-0.07035	-0.07033	-
(122)	1-(79)	-	0.68626	0.68626	0.68626
(123)	(122) (113)	-	3.21889	3.22254	3.22222
(124)	(65)/2	_	0.05673	0.05673	0.05673
(125)	(117) (124)/(123)	_	0.01217	0.01216	0.01216
(126)	1+(125)/5	_	1.248	1.248	1.248

#### **REFERENCES**

- 1. Von Sanden, K. and Gunther, K., "The Strength of Cylindrical Shells, Stiffened by Frames and Bulkheads, under Uniform External Pressure on All Sides," David Taylor Model Basin Translation 38 (Mar 1952).
- 2. Salerno, V.L. and Pulos, J.G., "Stress Distribution in a Circular Cylindrical Shell under Hydrostatic Pressure Supported by Equally Spaced Circular Ring Frames, Part 1 Theory," Polytechnic Institute of Brooklyn Aeronautical Laboratories Report 171-A (Jun 1951).
- 3. Lunchick, M.E. and Short, R.D., Jr., "Behavior of Cylinders with Initial Shell Deflection," David Taylor Model Basin Report 1150 (Jul 1957).

#### INITIAL DISTRIBUTION

#### Copies

- 13 CHBUSHIPS
  - 3 Tech Library (Code 312)
  - 1 Tech Asst (Code 106)
  - 1 Prelim Des Br (Code 420)
  - 1 Prelim Des Sec (Code 421)
  - 1 Ship Protec Sec (Code 423)
  - 1 Hull Des Br (Code 440)
  - 2 Sci and Res Sec (Code 442)
  - 1 Struct Sec (Code 443)
  - 1 Sub Br(Code 525)
  - 1 Hull Arr, Struc, and Preserv Br (Code 633)
- 2 CHONR, Mech Br (Code 438)
- 1 CNO, Op 373
- 1 CDR, USHOL
- 1 DIR, USNRL, Attn: TID
- 2 NAVSHIPYD PTSMH
- 2 NAVSHIPYD MARE
- 1 NAVSHIPYD NORVA, Attn: UERD (Code 280)
- 1 SUPSHIPINSORD, Groton
- 1 Elec Boat Div., General Dynamics Corp.
- 1 SUPSHIPINSORD, NEWPORT NEWS
- 1 NNS & DD Co.
- 1 SUPSHIPINSORD, PASCAGOULA
- 1 Ingalls Shipbfdg Corp.
- 1 ASST SECDEF R and E, Attn: Tech Library
- 1 CO, USNAVADMINU MIT
- 1 O in C, PGSCOL, Webb

		•	
	-		
	-		





MAY 20 1982

APR 1 8 1986

-

1